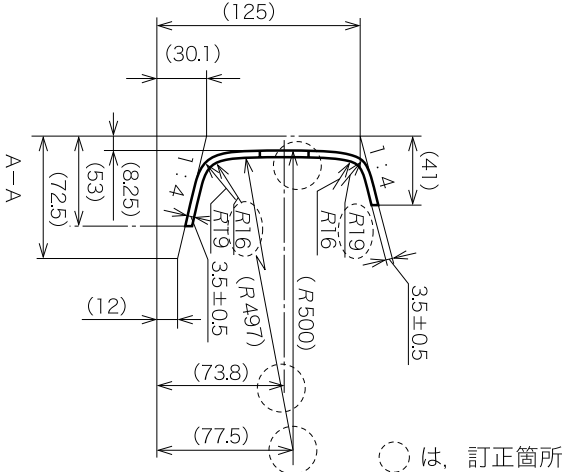


接着絶縁レール

正 誤 票

区分	位置	正
	付図 2.4	 <p>Technical drawing of a bonded insulation rail. The drawing shows a cross-section of the rail with various dimensions and radii. Dimensions are given in millimeters and are enclosed in parentheses to indicate corrections. The drawing includes a section line A-A. The dimensions are: (125) total width, (30.1) distance from left edge to start of top curve, (41) height of top curve, (72.5) distance from left edge to start of bottom curve, (53) distance from left edge to start of bottom curve, (8.25) distance from start of bottom curve to centerline, (12) distance from centerline to bottom edge, (73.8) distance from centerline to right edge, (77.5) distance from centerline to right edge, (R16) radius of top curve, (R19) radius of bottom curve, (R497) radius of bottom curve, (R500) radius of bottom curve, 1:4 slope, 1:4 slope, 3.5±0.5 thickness, and 3.5±0.5 thickness. A legend indicates that circles represent correction locations.</p> <p>○ は、訂正箇所</p>

平成 17 年 7 月 1 日作成